


**Standard Features**

- S-60 has 20.3 m (66 ft) working height
- S-65 has 21.9 m (71 ft) working height
- S-60 has 15.3 m (50 ft 4 in) horizontal reach
- S-65 has 16.8 m (55 ft 3 in) horizontal reach
- Up to 227 kg (500 lb) lift capacity
- Full-time active oscillating axle
- Tier II emission capable engine
- Dual fuel (Gas/LPG) or diesel engine options
- Hall effect joystick controllers
- Fully proportional joystick controls with ramp up/down feature
- Hydraulic platform rotation
- 360° continuous turntable rotation
- 12V DC auxiliary power

- Fuel select switch on platform and ground control panels (Gas/LPG models)
- Closed-loop hydrostatic drive
- Positive traction drive
- Drive enable system
- Self-levelling platform
- Locking turntable covers
- Anti-restart engine protection
- Foot switch time out
- Auto engine fault shutdown
- AC wiring to platform
- Wire braided hose
- Tilt alarm
- Horn
- Hour meter

**Range of Motion**




**Options and Accessories**

- Alarm package
- Cold start packages
- 2700 or 5000 watt AC generator
- 2.44 m (8 ft) steel platform
- 340 kg (750 lb) lift capacity option on the S-60
- Platform swing gate
- Air line to platform
- Platform rail pinch guard
- Platform work lights
- Lockable platform control box cover
- Second 12V battery
- Tool tray
- Fluorescent tube caddy
- Hostile environment packages
- Hydraulic oil cooler
- LPG tank
- GS/LPS rating for GM engine powered machines
- Driving lights
- Weld cables
- Diesel scrubber

**Standards Compliance**

- ANSI/SIA A92.5
- CE compliance option
- CSA CAN3-B354.4-M82
- AS 1418.10

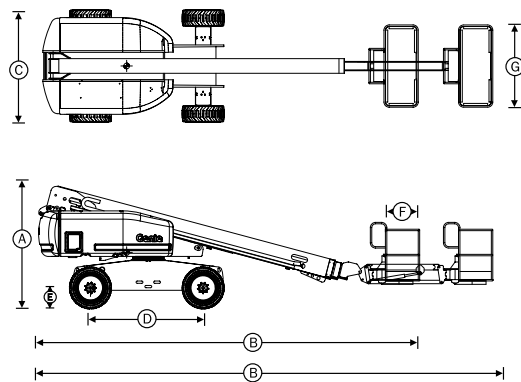

**Specifications**

Model	S-60 Metric	US	S-65 Metric	US
Working height max*	20.3 m	66 ft 2 in	21.9 m	71 ft 4 in
Platform height max	18.3 m	60 ft 2 in	19.9 m	65 ft 4 in
(A) Height - stowed	2.69 m	8 ft 10 in	2.69 m	8 ft 10 in
(B) Length - stowed	8.33 m	27 ft 4 in	9.45 m	31 ft
(C) Width	2.49 m	8 ft 2 in	2.49 m	8 ft 2 in
(D) Wheelbase	2.74 m	9 ft	2.74 m	9 ft
(E) Ground clearance	30 cm	12 in	30 cm	12 in
(F) Platform length: 1.83 m	76 cm	30 in	76 cm	30 in
2.44 m	91 cm	36 in	91 cm	36 in
(G) Platform width: 1.83 m	1.83 m	72 in	1.83 m	72 in
2.44 m	2.44 m	96 in	2.44 m	96 in
Horizontal reach max	15.3 m	50 ft 4 in	16.8 m	55 ft 3 in
Maximum lift capacity 1.8 m platform	227 kg	500 lb	227 kg	500 lb
Maximum lift capacity 2.44 m platform	227 kg	500 lb	227 kg	500 lb
Turning radius - outside	5.66 m	18 ft 7 in	5.66 m	18 ft 7 in
Turning radius - inside	2.39 m	7 ft 10 in	2.39 m	7 ft 10 in
Turntable rotation	360° continuous		360° continuous	
Turntable tailswing	1.19 m	3 ft 11 in	1.19 m	3 ft 11 in
Power source	GM 3.0L 59 kw (80 hp), Duel Fuel Deutz Diesel F3L 2011F 36 kw (49 hp) Perkins Diesel 404-22 37 kw (50 hp)			
Controls	ALC 500		ALC 500	
Platform rotation	160°		160°	
Tyres	15 - 19.5 NHS		15 - 19.5 NHS	
Hydraulic tank capacity	170.3 litre	45 gal	170.3 litre	45 gal
Fuel tank capacity	151.4 litre	40 gal	151.4 litre	40 gal
Weight**	9,662 kg	21,301 lb	10,349 kg	22,815 lb
Drive speed - stowed 2WD	7.1 km/h	4.4 mph	7.2 km/h	4.5 mph
Drive speed - stowed 4WD	6.0 km/h	3.7 mph	5.6 km/h	3.5 mph
Drive speed - extended (all models)	1.0 km/h	0.6 mph	1.0 km/h	0.6 mph
Gradeability*** - stowed	2WD 30%		30%	
	4WD 45%		45%	

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Weight will vary depending on options and/or country standards.  
 \*\*\* (Gradeability is theoretical, traction-dependent)



**Self-Propelled Telescopic Booms**

Designed for easy delivery and fast set-up.



Distributed By:

**Genie Industries**

**GENIE AUSTRALIA**  
 591 Boundary Road, Darra Qld 4076  
 PO Box 394, Richlands Qld 4077  
 Telephone **07 3375 1660**  
 Fax 07 3375 1002  
<http://www.genieindustries.com>

**GENIE UNITED STATES**  
 18340 NE 76th Street  
 P. O. Box 97030  
 Redmond, Washington 98073-9730  
 Telephone **(425) 881-1800**  
 Toll Free in USA/Canada **800-536-1800**  
 Fax (425) 883-3475  
<http://www.genieindustries.com>

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie S-60 and S-65 Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie S-60 or S-65, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1999 by Genie Industries. "Genie" and "S" are Registered Trademarks of Genie Industries in the USA and many other countries. Genie is a Terex company. Genie is the owner of US Patent: 5,447,331 and Patents Pending, S60 6K 0503J, Part No. 650116, GEN0325, November 2003.